




# SPIROMIX TUBE

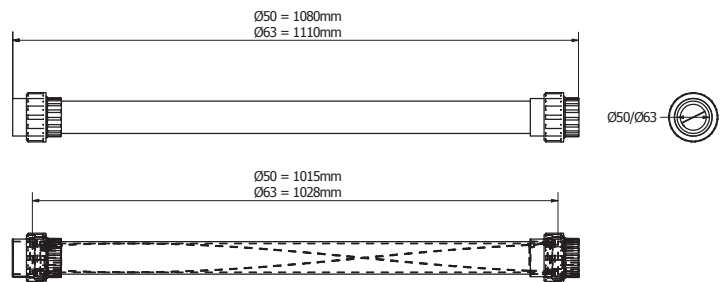

SKIOLD MAKES THE DIFFERENCE!

## TECHNICAL INFORMATION:

Item numbers	305 050 000	305 063 000
Item text	Spiromix tube PVC Ø50 PN10 cpl.	Spiromix tube PVC Ø63 PN10 cpl.
L x W x H	1080 x 78 x 78 mm	1110 x 95 x 95 mm
Build-in length	1015 mm	1028 mm
Transportweight	1,8 kg	2,3 kg
Flowspeed	1 - 8 kg/s	1 - 8 kg/s
Temperature Range	4 - 50° C	4 - 50° C
Pressure Range (feed)	2 - 4 bar	2 - 4 bar
Connections	Ø50 mm feeding tube	Ø63 mm feeding tube
Material (Tubes and Unions)	PVC	PVC
Material (Liner)	Stainless Steel (AISI 304)	Stainless Steel (AISI 304)
Placement	1 pcs. "spiromix" for every app. 50 m on longer, straight pipelines (not on the first app. 50 m after the feedpump, or on the first app. 15 m after corners). By strongly seperative feedsorts they must be placed at a shorter interval.	