




The Green Solution for Water Storage

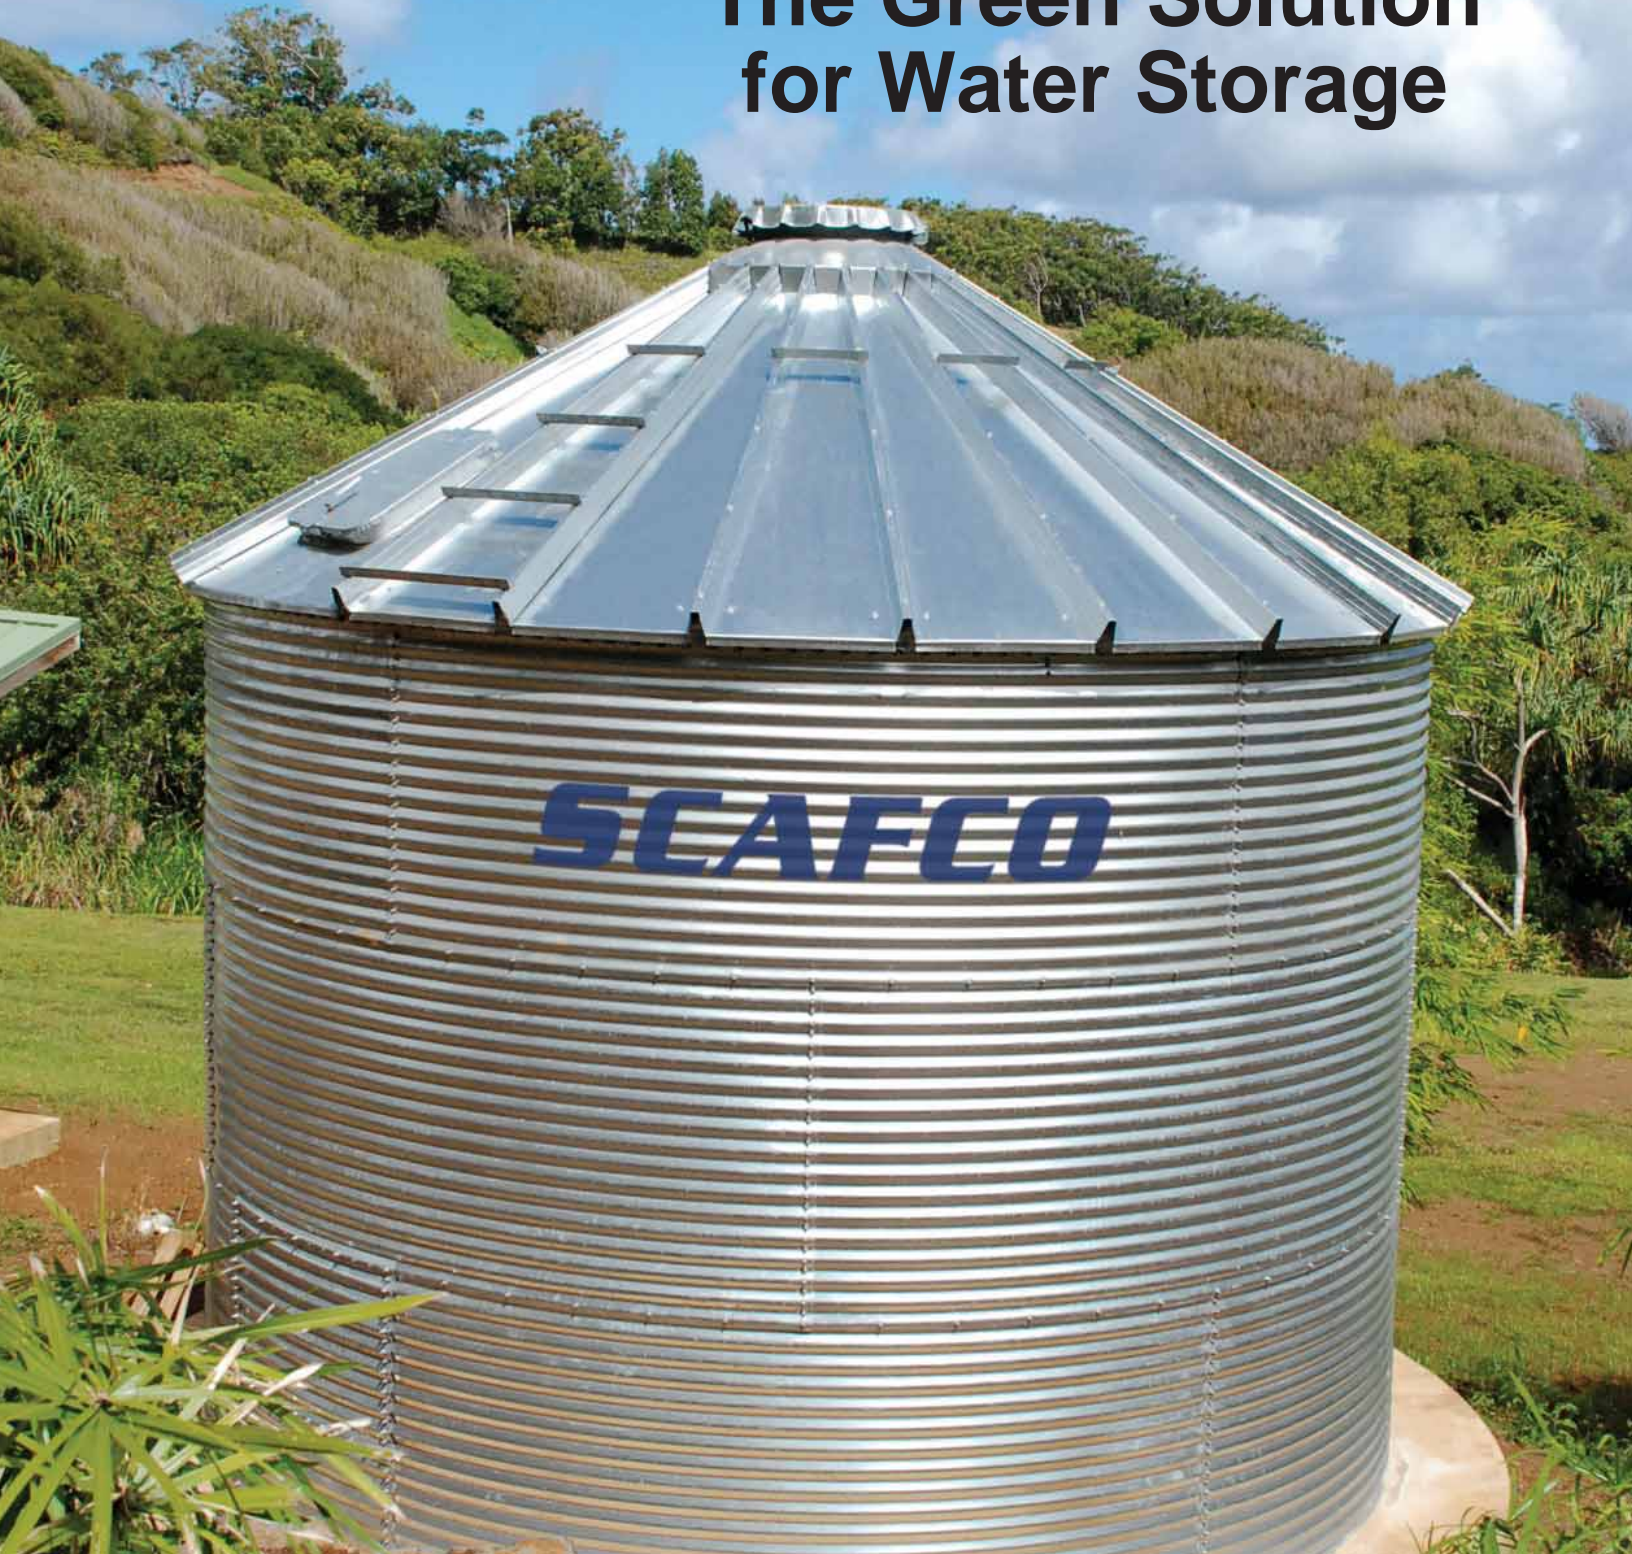

Water Tanks

Quality • Durable • Low Maintenance • Economical



Overhead Water Tank mounted on tower

- **Corrosion Resistant**
- **Life Cycle Costs**
- **Pre-Engineered Tank System**
- **Local Service**
- **Qualified Installation**



17,300 Gallon (65,490 L) Water Storage Tank for residential use



18,100 Gallons each (68,515 L) Water Storage Tanks for rain water collection




35,600 Gallons each (134,760 L) Water Storage Tank

Water Tanks

SCAFCO designs and manufactures water tank systems in 11 different diameters (6 feet to 36 feet) with wall heights up to 14 feet and capacities in excess of 100,000 gallons. (Larger tanks available upon request)

High-quality galvanized steel tank exteriors are hot-dipped in zinc coating for dependable and lasting protection. SCAFCO water tanks have an internal flexible liner that creates a watertight membrane ensuring stored water never makes contact with the tank's steel surface. High-quality materials used in SCAFCO water tanks minimize corrosion and maintenance. For more information visit www.SCAFCO.com.

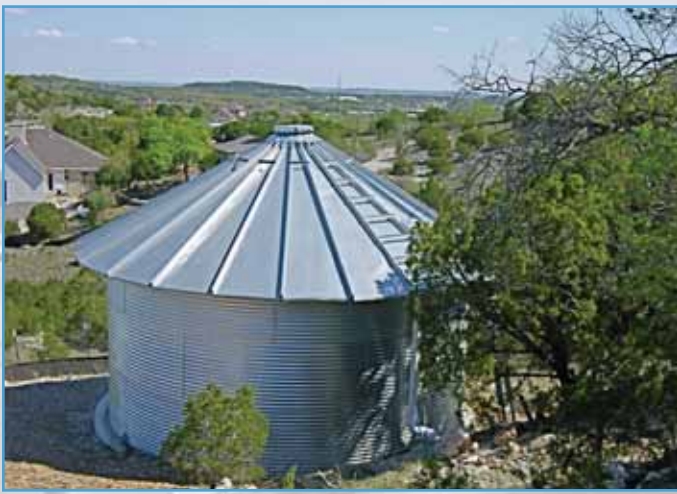

Water Storage Tank for agricultural use



Water Storage Tanks are designed to meet custom needs

Water Tank Specifications

WATER TANK MODEL	DIAMETER		EAVE HEIGHT		OVERALL HEIGHT		CAPACITY	
	FEET	METERS	FEET	METERS	FEET	METERS	GALLONS	LITERS
601LSTP	6'	1.83	3' 8"	1.11	5' 2"	1.59	600	2,270
602LSTP	6'	1.83	7' 3"	2.20	8' 9"	2.67	1,400	5,300
603LSTP	6'	1.83	10' 9"	3.28	12' 4"	3.75	2,100	7,950
604LSTP	6'	1.83	14' 4"	4.37	15' 10"	4.84	2,900	10,980
901LSTP	9'	2.74	3' 8"	1.11	6' 1"	1.85	1,500	5,680
902LSTP	9'	2.74	7' 3"	2.20	9' 7"	2.93	3,100	11,740
903LSTP	9'	2.74	10' 9"	3.28	13' 2"	4.02	4,800	18,170
904LSTP	9'	2.74	14' 4"	4.37	16' 9"	5.10	6,500	24,605
1201LSTP	12'	3.66	3' 8"	1.11	7' 3"	2.20	2,600	9,840
1202LSTP	12'	3.66	7' 3"	2.20	10' 9"	3.29	5,600	21,200
1203LSTP	12'	3.66	10' 9"	3.28	14' 4"	4.37	8,600	32,550
1204LSTP	12'	3.66	14' 4"	4.37	17' 11"	5.45	11,600	43,910
1501LSTP	15'	4.57	3' 8"	1.11	8' 1"	2.47	4,100	15,520
1502LSTP	15'	4.57	7' 3"	2.20	11' 8"	3.55	8,800	33,310
1503LSTP	15'	4.57	10' 9"	3.28	15' 2"	4.63	13,500	51,100
1504LSTP	15'	4.57	14' 4"	4.37	18' 9"	5.72	18,100	68,515
1801LSTP	18'	5.49	3' 8"	1.11	8' 11"	2.73	6,000	22,712
1802LSTP	18'	5.49	7' 3"	2.20	12' 6"	3.81	12,700	48,075
1803LSTP	18'	5.49	10' 9"	3.28	16' 1"	4.90	19,400	73,400
1804LSTP	18'	5.49	14' 4"	4.37	19' 7"	5.98	26,100	98,800
2101LSTP	21'	6.4	3' 8"	1.11	9' 10"	2.99	8,200	31,040
2102LSTP	21'	6.4	7' 3"	2.20	13' 4"	4.08	17,300	65,490
2103LSTP	21'	6.4	10' 9"	3.28	16' 11"	5.16	26,400	99,930
2104LSTP	21'	6.4	14' 4"	4.37	20' 6"	6.24	35,600	134,760
2401LSTP	24'	7.32	3' 8"	1.11	10' 8"	3.25	10,700	40,500
2402LSTP	24'	7.32	7' 3"	2.20	14' 3"	4.34	22,600	85,550
2403LSTP	24'	7.32	10' 9"	3.28	17' 9"	5.42	34,500	130,600
2404LSTP	24'	7.32	14' 4"	4.37	21' 4"	6.51	46,500	176,020
2701LSTP	27'	8.23	3' 8"	1.11	11' 0"	3.34	13,500	51,100
2702LSTP	27'	8.23	7' 3"	2.20	14' 6"	4.43	28,600	108,260
2703LSTP	27'	8.23	10' 9"	3.28	18' 1"	5.51	43,700	165,420
2704LSTP	27'	8.23	14' 4"	4.37	21' 8"	6.59	58,800	222,580
3001LSTP	30'	9.14	3' 8"	1.11	11' 10"	3.60	16,700	63,220
3002LSTP	30'	9.14	7' 3"	2.20	15' 5"	4.69	35,300	133,625
3003LSTP	30'	9.14	10' 9"	3.28	18' 11"	5.77	54,000	204,410
3004LSTP	30'	9.14	14' 4"	4.37	22' 6"	6.86	72,600	274,820
3301LSTP	33'	10.06	3' 8"	1.11	12' 8"	3.87	20,200	76,465
3302LSTP	33'	10.06	7' 3"	2.20	16' 3"	4.95	42,700	161,640
3303LSTP	33'	10.06	10' 9"	3.28	19' 10"	6.03	65,300	247,190
3304LSTP	33'	10.06	14' 4"	4.37	23' 4"	7.12	87,900	332,740
3601LSTP	36'	10.97	3' 8"	1.11	13' 7"	4.13	24,100	91,230
3602LSTP	36'	10.97	7' 3"	2.20	17' 1"	5.21	50,900	192,675
3603LSTP	36'	10.97	10' 9"	3.28	20' 8"	6.30	77,800	294,500
3604LSTP	36'	10.97	14' 4"	4.37	24' 3"	7.38	104,600	396,950



5400 East Broadway Avenue
P.O. Box 11215
Spokane, Washington 99211-1215, USA

Toll Free: 1.800.224.0676
Telephone: +1.509.535.1571
Fax: +1.509.535.9130
Email: mail@SCAFCO.com
Web: www.SCAFCO.com